



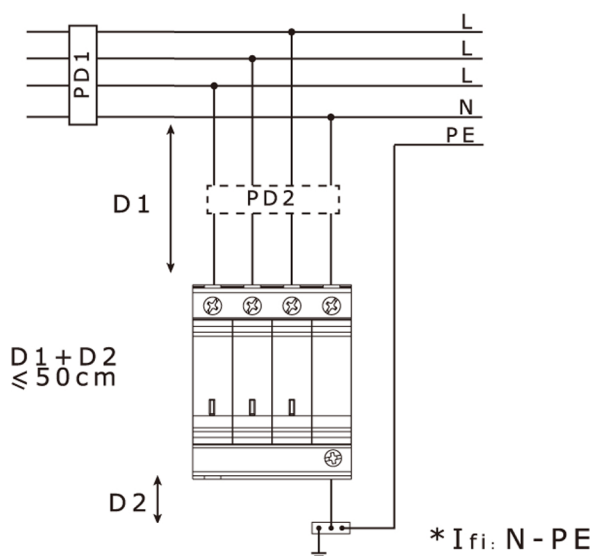

2TAN207002P0001

Parafoudre
Surge Protective Device
Überspannungsableiter
Scaricatore di sovratensioni
Pararrayo
Protecção contra sobretensões
Skydd mot överspänningar
Защита от перенапряжений
电涌保护器



OVR T2 3N 40-385 P (TS) QS

PD1-PD2

$\overline{PD2} \Rightarrow PD1 \leq 125A^*$
 $PD1 > PD2 \Rightarrow PD2 \leq 125A^*$

*125AgT00

I_{scCR} (L-N, L-PE, L-L)	I_{fi} (N-PE*)	(xN, Nx)	I_{PE} (xL)	Type	
100 kA a.c.	100 A a.c.	$\leq 10 \mu A$	$\leq 1000 \mu A$	OVR T2 ... : Type 2 / Class II	IEC 61643-11 / EN 61643-11


$L > 10 m$

$L \leq 10 m$ $L \leq 10 m$


$-40^{\circ}C \text{ } +80^{\circ}C$

$\leq 93 \%$

通信母插头端子
将通信母插头端子从电涌保护器上拔出后对其
进行接线，然后插回。

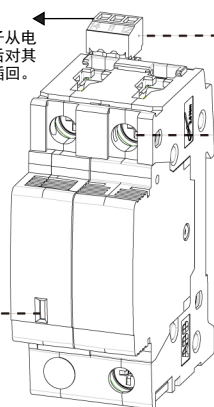

min.: 0,5 mm² / 20 AWG
max.: 1,5 mm² / 16 AWG



min.: 12 V_{ac} / 10 mA
max.: 250 V_{ac} / 1 A

2,8 Nm / 24,5 lb.in

12,5 mm / 0.5 in

min.: 2,5 mm² / 14 AWG
max.: 35 mm² / 4 AWG

12,5 mm / 0.5 in

min.: 2,5 mm² / 14 AWG
max.: 35 mm² / 4 AWG

