PHILIPS

CorePro LEDtube 1200mm 15.5W 840 T8

929003519702



CorePro, LEDtube, T8, EM/Mains, 1200 mm, 15.5 W, 36W TL-D, 4000 K, 1800 lm, CRI 80, 50000 hour(s)



CorePro, LEDtube, T8, EM/Mains, 1200 mm, 15.5 W, LED alternative to 36W TL-D, 4000 K, 1800 lm, CRI 80, 50000 hour(s), 116 lm/W, EEL E, G13, Beam angle 240 degree(s), Glass, 1200 mm, RG0, SDCM 6, PF 0.9, IP20, SVM 0.4, PstLM 1

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

General Information

Cap-Base	G13
Nominal lifetime	50,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Warranty period	3 years

Light Technical

Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	1,800 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	116 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	15.5 W
Lamp Current (Nom)	84 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	36W TL-D
Inrush current at mains	5.08
Max. lamp no. on MCB B type 10A - Mains	91
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	91
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	24
Max. lamp no. on MCB B type 16A - Mains	145
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	145
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	38
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	60 °C

Controls and Dimming

Dimmable	No

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8
Net Weight (Piece)	0.220 kg

Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance
Energy Consumption kWh/1000 h	16 kWh
EPREL Registration Number	1827702
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable

Product Data

Order product name	CorePro LEDtube 1200mm 15.5W 840 T8
Full product name	CorePro LEDtube 1200mm 15.5W 840 T8
Full product code	871951444807000
Order code	929003519702
Material Nr. (12NC)	929003519702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514448070
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514448087


Dimensional drawing

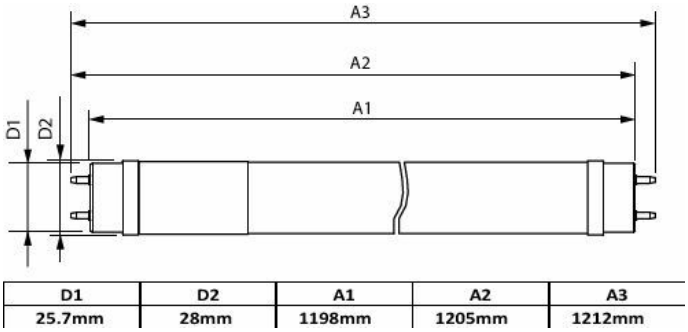

D1	D2	A1	A2	A3
25.7mm	28mm	1198mm	1205mm	1212mm

Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 15.5W 840 T8	25.7 mm	28 mm	1,198 mm	1,205 mm	1,212 mm

Photometric data

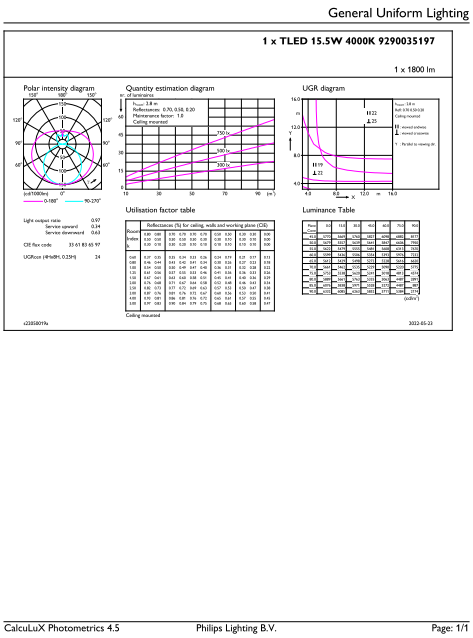
General Uniform Lighting

1 x TLED 15.5W 4000K 9290035197

1 x 1800 lm

Polar intensity diagram

Quantity estimation diagram


UGR diagram

Utilisation factor table


Luminance Table

CalcuLuX Photometrics 4.5 Philips Lighting B.V. Page: 1/1

General uniform lighting - CorePro LEDtube 1200mm 15.5W 840 T8

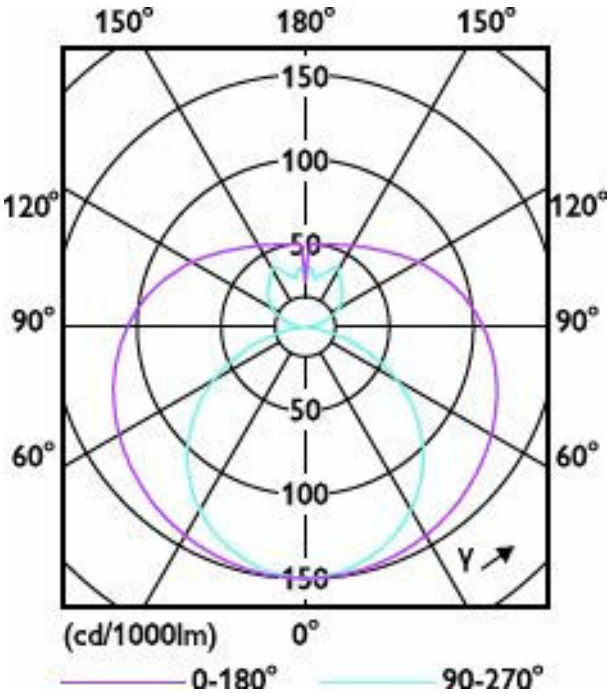


Light Distribution Diagram - CorePro LEDtube 1200mm 15.5W 840 T8

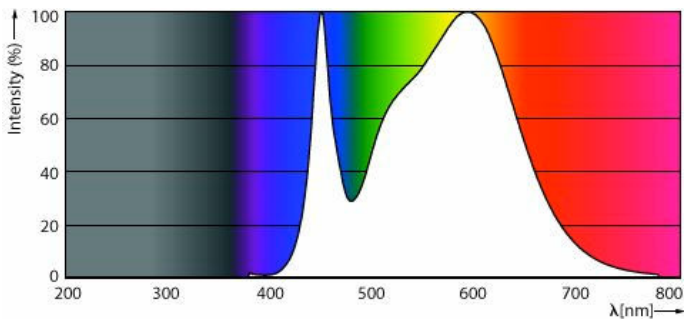


Spectral Power Distribution Colour - CorePro LEDtube 1200mm 15.5W 840 T8

Lifetime

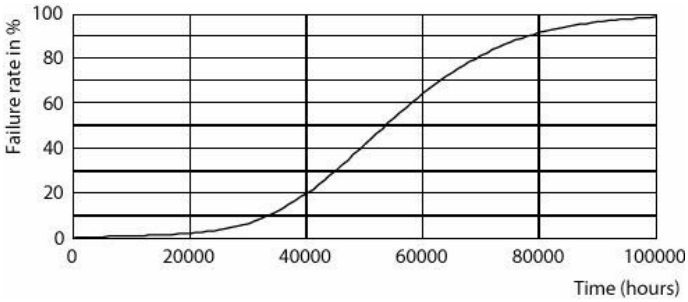


Life Expectancy Diagram


Lumen Maintenance Diagram - CorePro LEDtube 1200mm 15.5W 840 T8

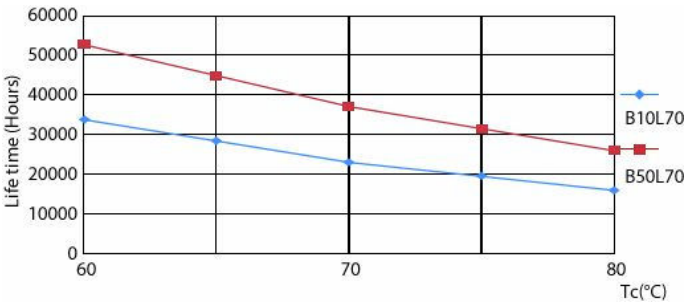

LifetimeVsTc

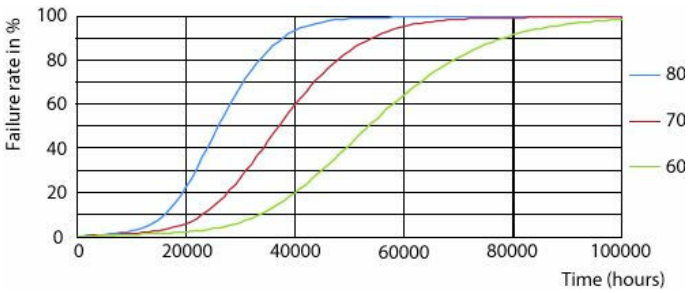

FailureRate

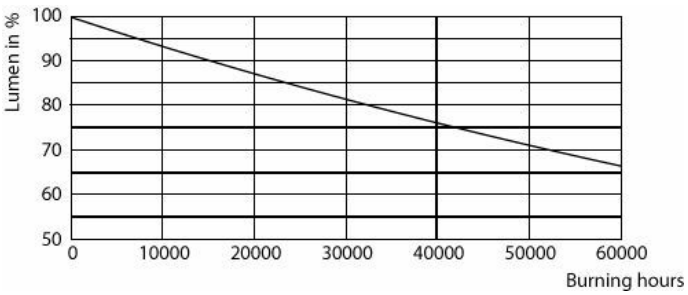

Lumen Maintenance Diagram - CorePro LEDtube 1200mm 15.5W 840 T8

Related Documents

Documents and certificates	Document Name	Download
Installation Instructions	online-QIG-for-324166183191-Corepro-LEDtube-INI.pdf	Download
Environmental Product Declaration	EPD-Philips-CorePro-LEDtube-EM-Mains-T8-COMF-1367-Ref-929003519702-EPD.pdf	Download

Photometry and lighting design	Document Name	Download
IES File	LEDtube_COR_EU2_15,5W_G13_1800lm_840-IES.IES	Download

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.